


# GEAR MOTOR ASSY

Gear Motor Assy D42-R256-I7700-O30 with TIV25E and Connector  
POGSKLSM4M3V3 / 383106395020

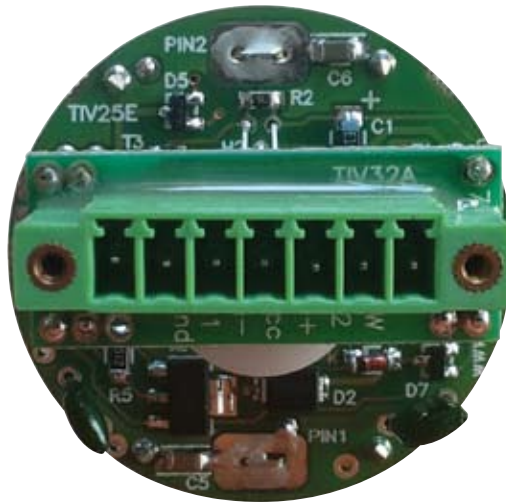

## Gear Motor Assy D42-R256-17700-O30 with TIV25E and Connector


### Product Description

### Specifications

- Reduction Ratio: 1/256
- Output Shaft: Steel
- Motor Specification: 24V 7.700 rpm

### Includes

- Gear Motor Assy D42-R256-17700-O30 1/256R
- Front connection board TIV 25E for GM for SM4V3
- Connector 7 pin. R=3.5 for screwed fast. green



# GEAR MOTOR ASSY

Gear Motor Assy D42-R256-I7700-O30 with TIV25E and Connector

## Technical Capabilities

### Operation

Rated Voltage	24 V D.C. - Stable Power Source
Rated Torque	30 kgf.cm - 10mm from shaft end
Radial Load	5kg-f
Axial Load	3kg-f
Turning Direction	Shaft horizontal
Reverse Direction	C.W. CCW
Using Enviroment	Temperature - 10-60 deg C, Humidity - 20-90% RH
Preserve	Temperature - 20-70 deg C
Using Voltage Range	24 V(D.C.) +/- 10%

### Electrical Data

No Load Current	0.7 A Max.
No Load Speed	33 rpm +/- 10%
Rated Current	3.6 A
Rated Speed	28 rpm +/- 10%
Stall Current	19 A
Insulation	D.C. 500V 10MOhm min. - Motor terminal shell
Durable Voltage	100V (A.C.)' 1 minute min.
Coil Resistance	10.9 Ohm - Reference
Torque Constant	30.89 kgf.cm/A - Reference
Duty Cycle	20% / 30 min.

### Mechanical Capabilities

Reduction Ratio	1/256
Axial Play Of Shaft	0.3mm max.
Radial Play Of Shaft	0.10mm max.
Back Lash	1.2 deegree max.
Outside Appearance	No scratch defective... - By visual judgment

### Life Cycle

Life Cycle	108.000 cycles min After the rated life cycle test current @ rated load must stay within +/- 30% of the initial value and r.p.m. @ rated load must stay within +/- 20 % of the initial value. However change of the mechanical notice level was not considered as part of the testing.
------------	---