


# Monitoring Micro positioner using Helios Analytics program via RS485 bus – wiring diagram

2 x 2 twisted pair cable, unshielded, each wire 0,22mm<sup>2</sup>, UV stable (CAT 5),  
up to 500m from end to end

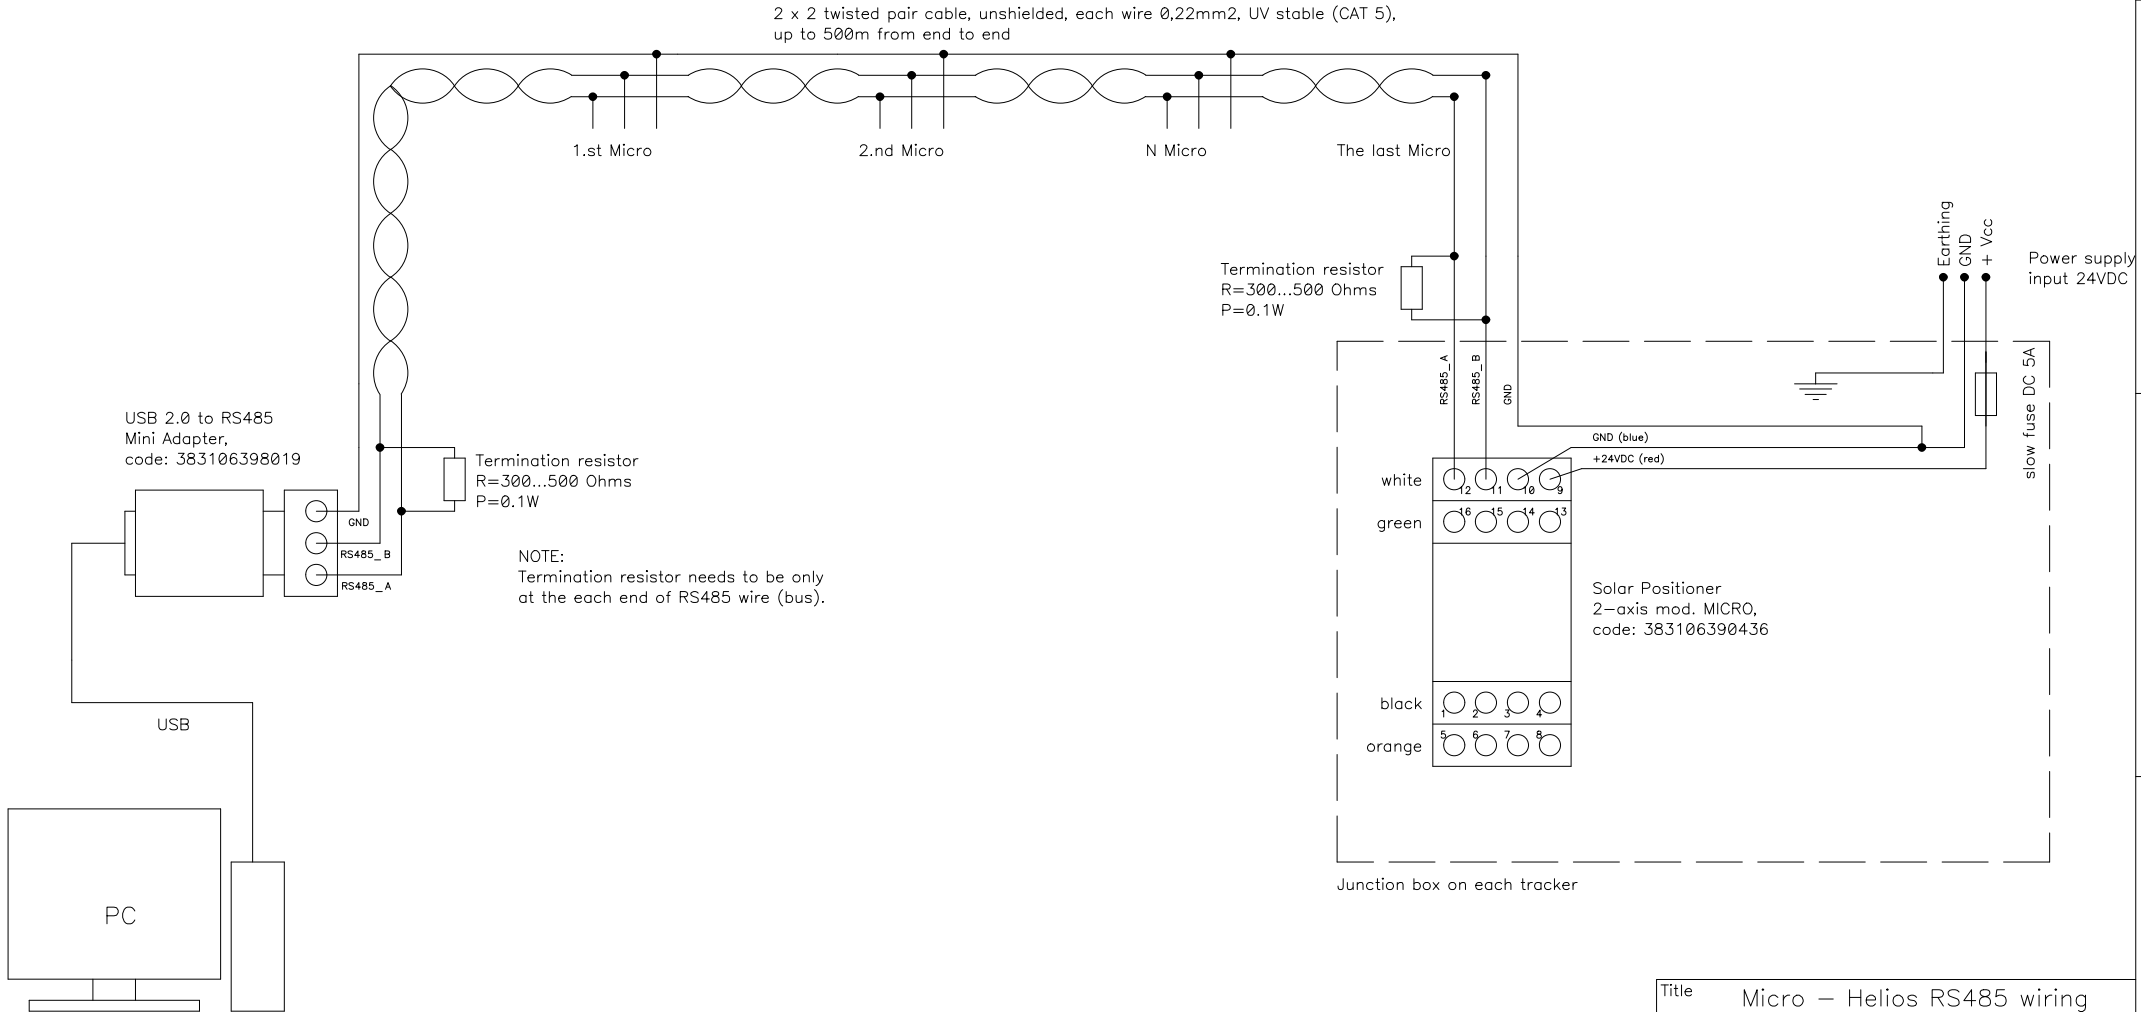

NOTE:  
Termination resistor needs to be only  
at the each end of RS485 wire (bus).

Title				Micro – Helios RS485 wiring	
Size	Number			Rev	
A2					
Date	11.10.11	Drawn by	Oman A.		
Filename			Sheet	of	