

YIELD ASSESSMENT OF THE PHOTOVOLTAIC POWER PLANT

Report number: PV-0-1404-0
Issued: 08 April 2014 11:11 (UTC)

1. Site info

Site name: Arica, Čile

Coordinates: **18° 29' 7.69" S, 70° 17' 33.31" W**
Elevation a.s.l.: 58 m
Slope inclination: 1°
Slope azimuth: 348° north

Annual global in-plane irradiation: **2345 kWh/m²**
Annual air temperature at 2 m: **21.5 °C**

Location on the map: <http://solargis.info/imaps/#loc=-18.48547,-70.292587&tl=Google:Satellite&z=12>

2. PV system info

Installed power: **0.5 kWp**
Type of modules: crystalline silicon (**c-Si**)
Mounting system: **1-axis tracking, horizontal EW**

Inverter Euro eff.: 97.5%
DC / AC losses: 5.5% / 1.5%
Availability: 99.0%



Annual average electricity production: **903.0 kWh**
Average performance ratio: **76.9%**

3. Geographic position



Google Maps © 2014 Google

4. Terrain horizon and day length

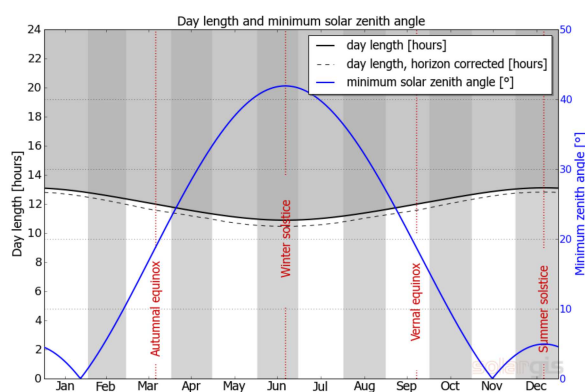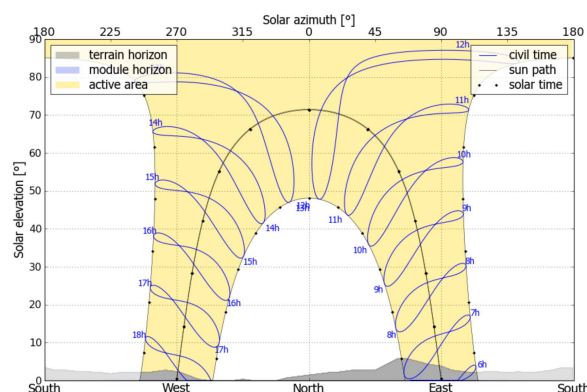

Left: Path of the Sun over a year. Terrain horizon (drawn by grey filling) and module horizon (blue filling) may have shading effect on solar radiation. Black dots show True Solar Time. Blue labels show Local Clock Time.


Right: Change of the day length and solar zenith angle during a year. The local day length (time when the Sun is above the horizon) is shorter compared to the astronomical day length, if obstructed by higher terrain horizon.

Site: Arica, Chile, lat/lon: -18.4855°/-70.2926°

PV system: 0.5 kWp, crystalline silicon, 1-axis horizontal EW, inclination. 0°

5. Global horizontal irradiation and air temperature - climate reference

Month	Gh _m	Gh _d	Dh _d	T ₂₄
Jan	231	7.45	2.63	23.9
Feb	197	7.02	2.75	24.2
Mar	207	6.67	2.45	23.6
Apr	165	5.49	2.04	22.2
May	142	4.58	1.77	20.7
Jun	117	3.90	1.82	19.5
Jul	122	3.93	1.96	18.9
Aug	148	4.77	2.21	19.3
Sep	175	5.82	2.44	19.9
Oct	215	6.94	2.43	20.7
Nov	227	7.58	2.36	21.7
Dec	237	7.65	2.52	23.0
Year	2183	5.98	2.28	21.5

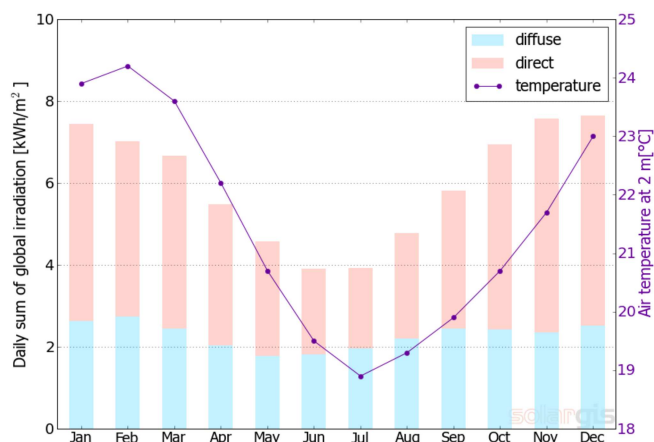


Long-term monthly averages:

Gh _m	Monthly sum of global irradiation [kWh/m²]
Gh _d	Daily sum of global irradiation [kWh/m²]
Dh _d	Daily sum of diffuse irradiation [kWh/m²]
T ₂₄	Daily (diurnal) air temperature [°C]

6. Global in-plane irradiation

1-axis tracking surface, inclination. 0°

Month	Gi _m	Gi _d	Di _d	Ri _d	Sh _{loss}
Jan	237	7.64	2.65	0.02	0.0
Feb	197	7.05	2.73	0.01	0.0
Mar	211	6.83	2.41	0.02	0.0
Apr	183	6.08	1.98	0.05	0.1
May	175	5.66	1.74	0.08	0.1
Jun	149	4.96	1.81	0.08	0.2
Jul	149	4.82	1.94	0.07	0.3
Aug	168	5.41	2.17	0.06	0.2
Sep	182	6.08	2.39	0.03	0.0
Oct	216	6.98	2.40	0.01	0.1
Nov	232	7.73	2.38	0.01	0.1
Dec	246	7.95	2.57	0.02	0.1
Year	2345	6.43	2.26	0.04	0.1

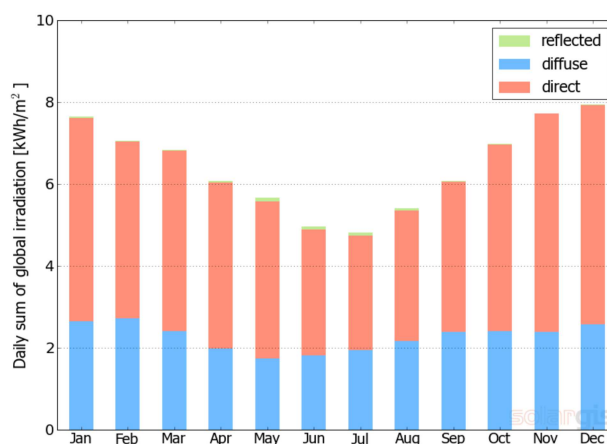

Long-term monthly averages:

Gi _m	Monthly sum of global irradiation [kWh/m²]
Gi _d	Daily sum of global irradiation [kWh/m²]
Di _d	Daily sum of diffuse irradiation [kWh/m²]
Ri _d	Daily sum of reflected irradiation [kWh/m²]

Sh_{loss} Losses of global irradiation by terrain shading [%]

Average yearly sum of global irradiation for different types of surface:


	kWh/m²	relative to optimally inclined
Horizontal	2182	96.6%
Optimally inclined (17°)	2258	100.0%
2-axis tracking	2893	128.1%
Your option	2346	103.9%

Site: Arica, Chile, lat/lon: -18.4855°/-70.2926°

PV system: 0.5 kWp, crystalline silicon, 1-axis horizontal EW, inclination. 0°

7. PV electricity production in the start-up

Month	E_{s_m}	E_{s_d}	E_{t_m}	E_{share}	PR
Jan	181	5.86	90.0	10.1	76.7
Feb	150	5.39	75.0	8.4	76.5
Mar	161	5.21	80.0	8.9	76.3
Apr	139	4.65	69.0	7.7	76.3
May	135	4.37	67.0	7.5	77.3
Jun	116	3.87	58.0	6.4	77.7
Jul	116	3.75	58.0	6.4	77.6
Aug	129	4.17	64.0	7.2	76.9
Sep	140	4.67	70.0	7.8	76.9
Oct	167	5.39	83.0	9.2	77.2
Nov	178	5.96	89.0	9.9	77.1
Dec	189	6.12	94.0	10.5	76.9
Year	1806	4.95	903.0	100.0	76.9

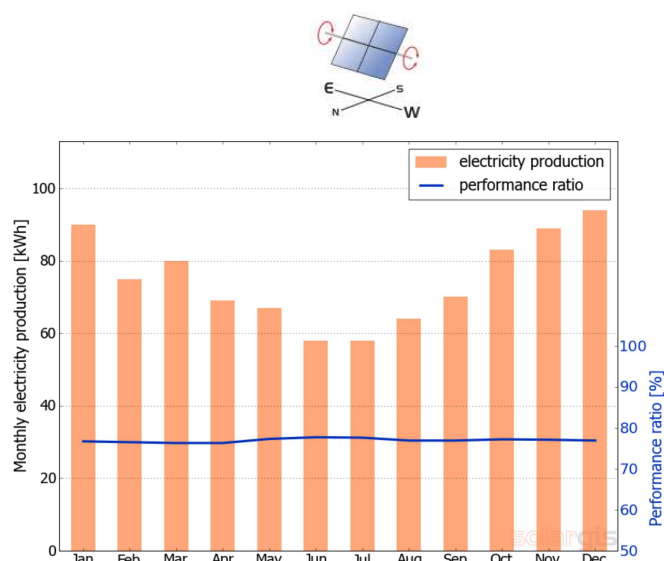

Long-term monthly averages:

E_{s_m} Monthly sum of specific electricity prod. [kWh/kWp]
 E_{s_d} Daily sum of specific electricity prod. [kWh/kWp]
 E_{t_m} Monthly sum of total electricity prod. [kWh]

E_{share} Percentual share of monthly electricity prod. [%]
 PR Performance ratio [%]

8. System losses and performance ratio

Energy conversion step	Energy output [kWh/kWp]	Energy loss [kWh/kWp]	Energy loss [%]	Performance ratio [partial %]	Performance ratio [cumul. %]
1. Global in-plane irradiation (input)	2348	-	-	100.0	100.0
2. Global irradiation reduced by terrain shading	2346	-2	-0.1	99.9	99.9
3. Global irradiation reduced by reflectivity	2269	-77	-3.3	96.7	96.6
4. Conversion to DC in the modules	2011	-258	-11.4	88.6	85.6
5. Other DC losses	1900	-111	-5.5	94.5	80.9
6. Inverters (DC/AC conversion)	1853	-47	-2.5	97.5	78.9
7. Transformer and AC cabling losses	1825	-28	-1.5	98.5	77.7
8. Reduced availability	1806	-19	-1.0	99.0	76.9
Total system performance	1806	-542	-23.1	-	76.9

Energy conversion steps and losses:

1. Initial production at Standard Test Conditions (STC) is assumed,
2. Reduction of global in-plane irradiation due to obstruction of terrain horizon and PV modules,
3. Proportion of global irradiation that is reflected by surface of PV modules (typically glass),
4. Losses in PV modules due to conversion of solar radiation to DC electricity; deviation of module efficiency from STC,
5. DC losses: this step assumes integrated effect of mismatch between PV modules, heat losses in interconnections and cables, losses due to dirt, snow, icing and soiling, and self-shading of PV modules,
6. This step considers euro efficiency to approximate average losses in the inverter,
7. Losses in AC section and transformer (where applicable) depend on the system architecture,
8. Availability parameter assumes losses due to downtime caused by maintenance or failures.

Losses at steps 2 to 4 are numerically modeled by pvPlanner. Losses at steps 5 to 8 are to be assessed by a user. The simulation models have inherent uncertainties that are not discussed in this report. Read more about simulation methods and related uncertainties to evaluate possible risks at <http://solargis.info/doc/pvplanner/>.

Site: Arica, Čile, lat/lon: -18.4855°/-70.2926°

PV system: 0.5 kWp, crystalline silicon, 1-axis horizontal EW, inclination. 0°

9. SolarGIS v1.8 - description of the database

SolarGIS is high-resolution climate database operated by GeoModel Solar. Primary data layers include solar radiation, air temperature and terrain (elevation, horizon).

Air temperature at 2 m: developed from the CFSR and GFS data (© NOAA NCEP, USA); years: 1994 - 2011; recalculated to 15-minute values. The data are spatially enhanced to 1 km resolution to reflect variability induced by high resolution terrain.

Solar radiation: calculated from the satellite and atmospheric data:

- Meteosat PRIME satellite (© EUMETSAT, Germany) 1994 - 2010, 15-minute or 30-minute values for Europe, Africa and Middle East,
- Meteosat IODC satellite (© EUMETSAT, Germany) 1999 - 2011, 30-minute values for Asia,
- GOES EAST satellite (© NOAA, USA) 1999 - 2012, 30-minute, partially 3-hourly values for Americas,
- MTSAT satellite (© JMA, Japan) 2007 - 2012, 30-minute values for Pacific,
- MACC (© ECMWF, UK) 1994 - 2012, atmospheric data,
- GFS, CFSR (© NOAA, USA), 1994 - 2012, atmospheric data.

This estimation assumes year having 365 days. Occasional deviations in calculations may occur as a result of mathematical rounding and cannot be considered as a defect of algorithms. More information about the applied data, algorithms and uncertainty can be found at: <http://solargis.info/doc/pvplanner/>.

10. Service provider

GeoModel Solar s.r.o. , Milana Marečka 3, 84107 Bratislava, Slovakia; Registration ID: 45 354 766, VAT Number: SK2022962766; Registration: Business register, District Court Bratislava I, Section Sro, File 62765/B

11. Mode of use

This report shows solar power estimation in the start-up phase of a PV system. The estimates are accurate enough for small and medium-size PV systems. For suntracking simulations, only theoretical options are shown without considering backtracking and shading. For large projects planning and financing, more information is needed:

1. Statistical distribution and uncertainty of solar radiation
2. Detailed specification of a PV system
3. Interannual variability and P90 uncertainty of PV production
4. Lifetime energy production considering performance degradation of PV components.

More information about full PV yield assessment can be found at: <http://solargis.info/doc/8>.

12. Disclaimer and legal information

Considering the nature of climate fluctuations, interannual and long-term changes, as well as the uncertainty of measurements and calculations, GeoModel Solar cannot take full guarantee of the accuracy of estimates. The maximum possible has been done for the assessment of climate conditions based on the best available data, software and knowledge. GeoModel Solar shall not be liable for any direct, incidental, consequential, indirect or punitive damages arising or alleged to have arisen out of use of the provided report.

This report is copyright to © 2014 GeoModel Solar, all rights reserved.
SolarGIS® is a trade mark of GeoModel Solar

13. Contact information

This report has been generated for .

This document is electronically signed by GeoModel Solar. The authenticity of this report can be verified here:
<http://solargis.info/doc/120>