




Limit switch, roller lever adjustable with cable 2m and diode 5A

Code 2: **ES-RL-C2M**


Code: **7604**

1×NO+1×NC, 5A/250V AC, 20-90mm, IP65

This limit switch is intended to use for limitation of solar tracker tracking range. Usually is needed 2 units per motor, depend from application.

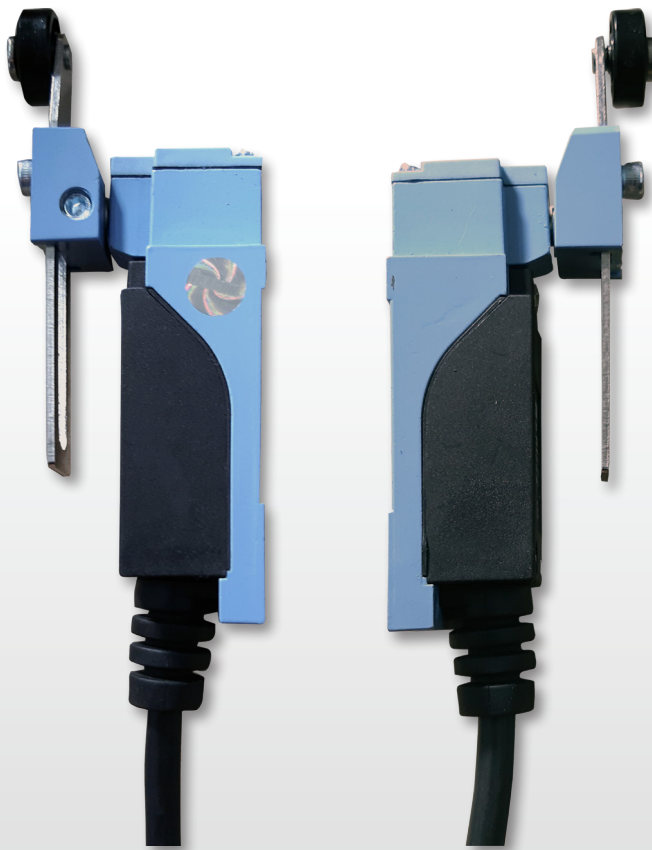

cord end terminal  
1,5 mm<sup>2</sup>

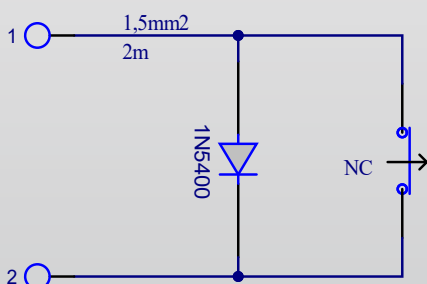


**I<sub>th</sub>**  
10 A

Rated thermal current (A)

**I<sub>e</sub>** (DC 13, 250 V)  
0,3 A

Min current (A)



The switch lever can be rotated 90°

**T<sub>a</sub>**  
-25...+55°C

Ambient temperature (°C)

**Mechanical service life**  
x10<sup>6</sup>

Mechanical service life

**I<sub>e</sub>** (AC 15, 230 V)  
2 A

Rated current

**U<sub>i</sub>**  
500 V

Rated insulation voltage (V)

**IP**  
65

IP protection degree

**Installation wire crosssection**  
0,5-1,5

Installation wire crosssection (mm<sup>2</sup>)

**Frequency of on and off**  
x1.800

Frequency of on and off (kj/h)

**I<sub>e</sub>** (AC 1, 230 V)  
5 A

Rated current

Technical Capabilities

